

SPEEDSTAKES™

The ½" and ¾" SpeedStakes™ allow for rapid and reliable stake installations for demos or ground types where traditional stakes won't work. They are comprised of our rock solid Flush Mounts and our new, larger Stainless Steel Spikes. Use the ½" Speed Stake with ground mounted fixtures where no riser is required, and use the ¾" Speed Stake with fixtures that require a riser (or with Modulus).



VINTAGE



¾"

½"

SPEEDSTAKES™ SPECIFICATIONS

Size (H x W): 9.5 in. x 4.0 in (¾" NPSM)

Size (H x W): 9.5 in. x 2.5 in (½" NPSM)

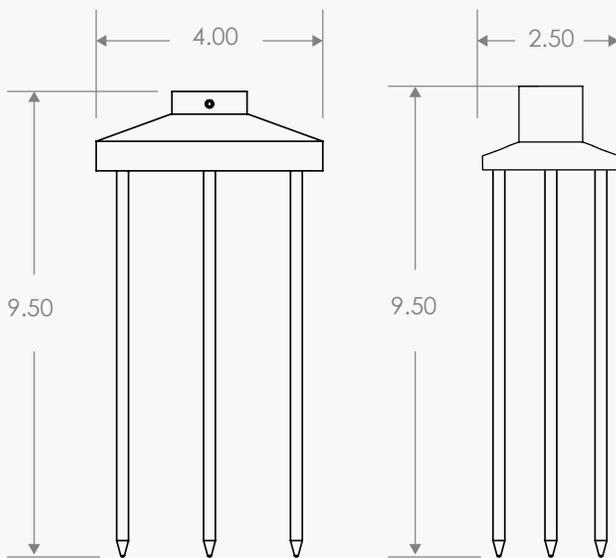
Weight: 0.75 lbs & 1.70 lbs

Construction: Solid Brass, Stainless Steel

Finish: Vintage Brass

Compatibility: Risers (¾" model)
Direct Connect Fixtures (½" model)

Warranty: 5-Year Limited Warranty*



¾" NPSM




½" NPSM

ORDERING INFORMATION

ACCESSORY	THREADING	FINISH
SSTK (SPEEDSTAKE™)	1/2 (½" NPSM)	VB (VINTAGE BRASS) ■
	3/4 (¾" NPSM)	

SSTK —
 1/2 —
 VB
 e.g. **SSTK1/2VB** = Vintage Brass ½" NPSM SpeedStakes™

COMPATIBLE PRODUCTS

SKU	ITEM	
Varies	Risers	
BT16xx	MR16 Bullet Light - Direct Connect	
BT11xx	MR11 Bullet Light - Direct Connect	
WLxxxxxx	Wash Light	
MBTxx	Modulus Bullet Light - Direct Connect	

*Lifetime Warranty for certified installations. See terms and conditions of sale for details.